

Engine	Cummins 6CTAA8.3
Rated Power	194 kW (264 hp) @ 2,200 rpm
Net Power	175 kW (238 hp) @ 2,200 rpm
Blade Width	4,572 mm
Maximum Speed	36.6 km/h
Draw Bar Pull	145 kN
Operating Weight	20,400 kg

425-AWD

MOTOR GRADER

LIUGONG



TOUGH WORLD. TOUGH EQUIPMENT.

425-6WD SPECIFICATIONS >>>

ENGINE

Emission Regulation	Tier 2 / Stage II
Model	Cummins 6CTAA8.3
Rated Power	194 kW (264 hp) @ 2,200 rpm
Net Power	175 kW (238 hp) @ 2,200 rpm
Number of Cylinders	6
Aspiration	Turbo, air-to-air intercooled

TRANSMISSION

Transmission Type	Power shift
Torque Converter	Three elements, single stage
Maximum Travel Speed, Fwd	36.6 km/h
Maximum Travel Speed, Rev	23 km/h
Number of Speeds, Fwd/Rev	6F/3R

AXLES

Differential Type	Locking
Final Drive Type	Geared tandem
Axle Oscillation	15°
Front Axle Type	All welded steel frame
Front Axle, Wheel Lean Angle	Left / right 17°

TANDEM DRIVE PERFORMANCE

Height	610 mm
Width	210 mm
Center Distance	1,632 mm

STEERING

Steering Configuration	Load sensing; Gear pump
Steering Relief Pressure	16.7±0.5 MPa
Minimum Turning Radius	8,000 mm
Steering Angle	±50°
Frame Articulation Angle	±20°

BRAKES

Service Brake Type	Wet, multi-disc
Service Brake Location	Rear axle

HYDRAULIC SYSTEM

Main Pump Type	Gear
Main Relief Pressure	18±0.5 MPa
Pilot Pump Flow	142 L/min

SERVICE CAPACITIES

Fuel Tank	373 L
Engine Oil	27.6 L
Cooling System	45 L
Hydraulic Reservoir	250 L
Transmission & Torque Converter	45 L
Tandems, Each	50 L

TIRES

Tire Size	20.5 - 25
-----------	-----------

MOLDBOARD PERFORMANCE

Bank Cut Angle	40~70°
Lift Above Ground	305 mm
Side Shift, Right / Left	725 / 675 mm
Maximum Sloping Angle	90°
Cutting Depth	650 mm
Circle Rotation	360°
Circle Diameter	1,576 mm
Circle Thickness	150 mm

DIMENSIONS

Wheelbase	6,520 mm
Overall Length	9,570 mm
Overall Height with Cab	3,460 mm
Clearance under Front Axle	695 mm
Moldboard Standard Length	4,572 mm
Moldboard Standard Thickness	25 mm
Moldboard Standard Height	680 mm

OPERATING WEIGHTS


Operating Weight	20,400 kg
On Front Wheels	6,150 kg
On Rear Wheels	14,250 kg

WORKING CAPACITIES

Maximum Draw Pull	145 kN
Cutting Pressure	9,300 kg

OPTIONAL EQUIPMENT

Rear Ripper
Front Dozer
Automatic Leveling System
Rotary Beacon

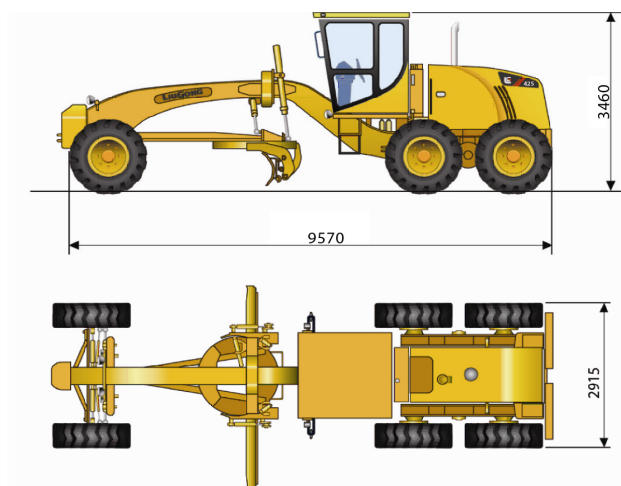

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China

T: +86 772 3886124

E: overseas@liugong.com

www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area.

06/2019 Designed by LiuGong